




Power hoists



90° Suspension bracket



Rotating hook block



Motor and gearbox



Operation via pendant control



Cable protection



Slip clutch with overload protection device




SV electronic control system



Connecting plug and socket standard components



Integrated safety brake

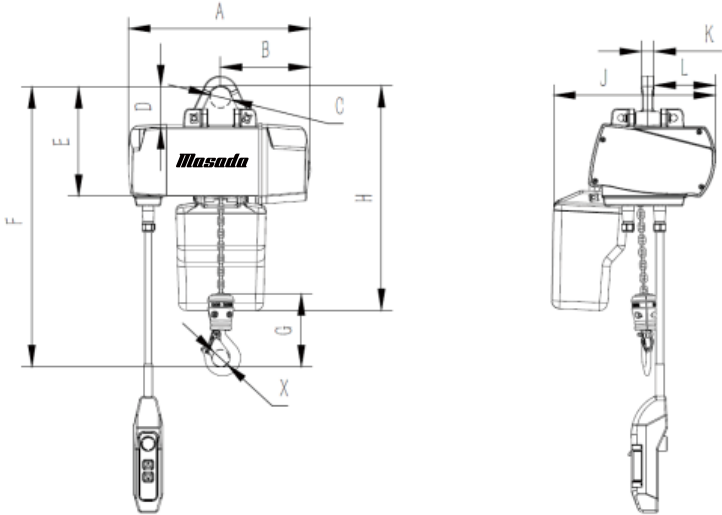

Technical Parameters

Model		EM125	EM250S	EM250	EM500	EM1000
Rated capacity kg		125	250	250	500	1000
Standard lift M		3	3	3	3	3
Lifting height range M		2~18	2~18	2~18	2~15	2~10
Work grade ISO		M5	M6	M5	M4	M4
Lifting speed M/MIN		5/20	1.4/5.6	2/8	1.5/6	0.75/3
Load chain size		4X12	4X12	4X12	5X15	5X15
Chain fall		1	1	1	1	2
Motor power KW		0.17/0.7	0.17/0.7	0.17/0.7	0.17/0.7	0.17/0.7
Motor rotating speed RPM		700/2800	700/2800	700/2800	700/2800	700/2800
Motor current A		0.8/1.5	0.8/1.5	0.8/1.5	0.8/1.5	0.8/1.5
Voltage V		380	380	380	380	380
Frequency HZ		50	50	50	50	50
ED FC%		16.6/33.4	16.6/33.4	13.4/26.6	10/20	10/20
Packing Size CM		38×36×37	38×36×37	38×36×37	38×36×37	38×36×37
Net weight KG		22	22	22	22.6	26.5
Dimensions (mm)	A	345	345	345	345	345
	B	170	170	170	170	170
	C	40	40	40	40	40
	D	77	77	77	77	77
	E	208	208	208	208	208
	F	357	357	357	388	395
	G	149	149	149	180	187
	H	425	425	425	425	425
	J	306	306	306	306	306
	L	116	116	116	116	116
	K	24	24	24	24	24
	X	24	24	24	27	29

Power hoists