





## HPW Series Ratchet Puller Winch

Designed for electric wire pulling for field needs : electric power; telephone line works, construction , farm and general purposes.

### Main Feature:

- UP and DOWN movement by moving the lever.
- Time-tested technique.
- Equipped with automatic mechanical brake and change pawl.
- More built-in safety factors than other brands
- Easily field repairable and inexpensive to maintain.
- Solid ductile and malleable iron construction

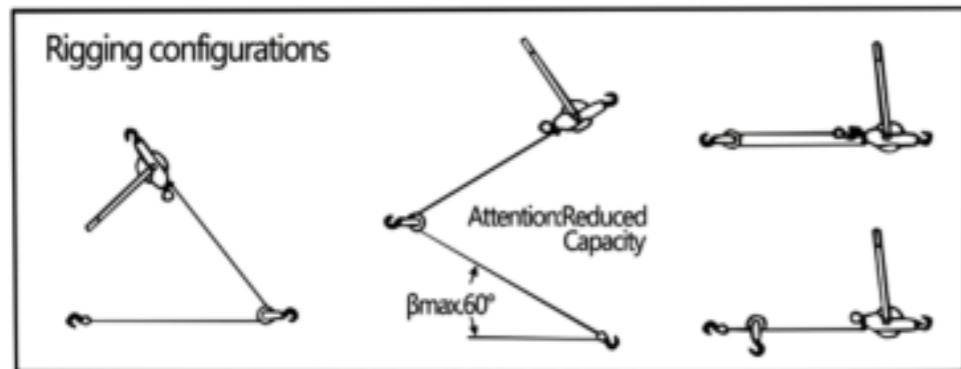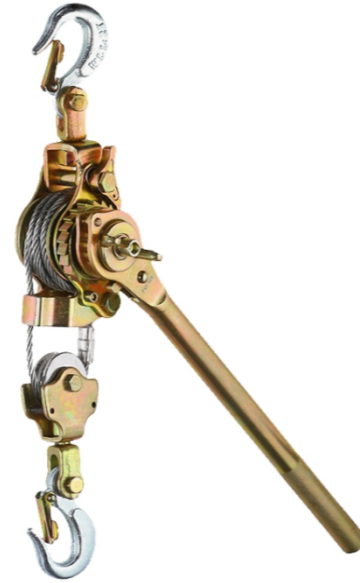

### Technical Parameters

Model	Capacity(kg)	Max.Length (mm)	Min.Length (mm)	Size of Wire (mm)	Net Weight (kg)
A-1000	1000	1210	410	4.5x2300	3.2
A-1500	1500	1400	480	5x2300	4.2
A-2000	2000	1400	480	5.5x2300	4.3
A-P1500	1000(single wire) 1500(double wire)	3300	480	5x3200	4.1
A-3000	3000	1400	480	6x2400	4.9



## HPN Hand Puller

### Main Feature:

- Drum and ratchet wheel are casted as one unit from aluminum alloy.
- Steel hand and frame finished with galvanization to resist chips and corrosion.
- Spring loaded ratchet control lever permits operation in any position and allows you to easily switch from lifting to lowering.
- Conforms to CE safety standard



### Technical Parameters

Description	Model	Rated Pull (KN)	Cable Size Dia(mm)* Length(m)	Effective Distance(m)	Surface	Qty/ctn (pcs)	Weight (kg)	Dimension (cm)
IT 2-hook&single-wheel puller	JTHP-A1TA1	4.9	Φ4.5*1.8	0.5	Galvanized	6	14	56*21*24
IT 2-hook&double-wheel puller	JTHP-A1TA2	4.9	Φ4.5*1.8	0.5	Galvanized	6	15	56*21*24
1.5T 2-hook&single-wheel puller	JTHP-A1.5TA1	7.4	Φ4.5*2.2	0.7	Galvanized	6	16.5	58*25*22
1.5T 2-hook&double-wheel puller	JTHP-A2TA2	9.8	Φ4.8*3	1.1	Galvanized	6	21	61*27*22
2T 2-hook&single-wheel puller	JTHP-A2TC2	14.7	Φ5.1*3	1.1	Chromed	6	21	61*26*22
2T top grade of 2-hook&double wheel puller	JTHP-A2TA2	9.8	Φ4.8*3	1.1	Galvanized	6	21	61*27*22
2T 2-hook&double-wheel puller	JTHP-A2TC2	14.7	Φ5.1*3	1.1	Chromed	6	21	61*26*22
2T top grade coloured ribbon of 2-hook&double wheel puller	JTHP-A2TE2	1.8*25	Φ4.5	2.1	Chromed	6	21	61*26*22

Description	Model	Rated Pull (KN)	Cable Size Dia(mm)* Length(m)	Effective Distance(m)	Surface	Qty/ctn (pcs)	Weight (kg)	Dimension (cm)
3T 2-hook&single-wheel puller	JTHP-A32TA1	14.7	Φ5.1*3.3	1.2	Galvanized	4	19	71*21*27
3T 2-hook&double-wheel puller	JTHP-A3TA2	14.7	Φ5.1*3.3	1.2	Galvanized	4	20	71*21*27
3T 3-hook&single-wheel puller	JTHP-A3TB1	14.7	Φ5.1*3.3	2.4	Galvanized	4	20	71*21*27
3T 3-hook&double-wheel puller	JTHP-A3TB2	14.7	Φ5.1*3.3	2.4	Galvanized	4	21	71*21*27
4T easy model of 2-hook&single wheel puller	JTHP-A4TA1E	19.6	Φ5.5*3.3	1.2	Galvanized	4	21	70*21*29
4T easy model of 2-hook&double wheel puller	JTHP-A4TA2E	19.6	Φ5.5*3.3	1.2	Galvanized	4	22	70*21*29
4T easy model of 3-hook&single wheel puller	JTHP-A4TB1E	19.6	Φ5.5*3.3	2.4	Galvanized	4	22	70*21*29
4T easy model of 3-hook&double wheel puller	JTHP-A4TB2E	19.6	Φ5.5*3.3	2.4	Galvanized	4	22.5	70*21*29
4T top grade of 2-hook&single wheel puller	JTHP-A4TA1	19.6	Φ6*3.6	2.35	Galvanized	4	12	74*23*14.5
4T top grade of 2-hook&double wheel puller(Al-alloy)	JTHP-A4TC2	19.6	Φ6*3.6	2.35	Galvanized	2	13	74*23*14.5
4T top grade of 3-hook&double wheel puller(Al-alloy)	JTHP-A4TD2	19.6	Φ6*3.6	2.7	Galvanized	2	13.5	74*23*14.5